

DEPTHCHARGE

The word "DEPTHCHARGE" is written in a bold, outlined, blocky font. The letters are white with a black outline. The final letter, "E", is replaced by a stylized illustration of a hand holding a dynamite stick. The hand is positioned at the top of the stick, and the stick is angled downwards. The dynamite stick has a lit fuse, with several jagged lines radiating from the tip, representing sparks or fire.

MANUFACTURED BY

Gremlin
Industries, inc.

OWNER'S MANUAL

**DEPTHCHARGE
OPERATING INSTRUCTIONS
AND
SERVICE MANUAL**

**GREMLIN INDUSTRIES, INC.
8401 Aero Drive
San Diego, CA. 92123**

TABLE OF CONTENTS

| | <u>PAGE NOS.</u> |
|---------------------------------------|------------------|
| INTRODUCTION | 1 |
| IMPORTANT NOTE | 2 |
| WARRANTY | 3 |
| REPACKAGING INSTRUCTIONS | 4 |
| REPACKAGING DIAGRAM | 5 |
| DEPTHCHARGE GAME CONCEPT | 6 - 8 |
| MAINTENANCE | 9 |
| OPERATIONAL WAVEFORMS | 10 - 17 |
| REPLACEABLE PARTS LIST | 18 - 19 |
| RETURNED MATERIAL AUTHORIZATION | 20 |
| SCHEMATICS | 21 |

INTRODUCTION

DEPTHCHARGE is an electronic game that makes extensive use of digital integrated circuitry and television monitor circuitry. This manual assumes the maintenance technician possesses a general knowledge of solid state circuitry microprocessor, TTL digital integrated circuitry and T.V. monitor concepts. Any individual NOT knowledgeable in these areas SHOULD NOT attempt repair of the electronic portion of this game. IT SHOULD BE NOTED THAT ANY ATTEMPT TO REPAIR THE GAME IN THE FIELD WITHOUT THE EXPRESS CONSENT OF THE FACTORY WILL IMMEDIATELY VOID THE WARRANTY!!!

IMPORTANT NOTES:

- | | |
|--------|--|
| NEVER | replace any components with anything other than exact replacement parts. (See Parts List located on Service Schematics.) |
| NEVER | remove circuit boards/connections while power is on. |
| DO NOT | replace the fuse with anything other than the proper value. A blown fuse indicates an overload condition within the game. Replacing the fuse with a higher value can cause severe damage to internal components if an overload occurs. |
| ALWAYS | consult the manual before attempting repairs. |

CORRESPONDENCE regarding this game should be addressed to:

GREMLIN INDUSTRIES, INC.
8401 Aero Drive
San Diego, California 92123
(714) 277-8700

IMPORTANT NOTE

An important service note is posted in the DEPTHCHARGE game and is repeated here for emphasis:

IF AT ANY TIME THE T.V. SCREEN SHOWS A MEANINGLESS DISPLAY OR THE GAME OTHERWISE MALFUNCTIONS, SIMPLY DROP A COIN INTO THE COIN MECHANISM. THIS SHOULD CORRECT THE PROBLEM. IF NOT, THE GAME REQUIRES SERVICE.

The circuitry in DEPTHCHARGE has been arranged so that the insertion of a quarter through the coin mechanism will reset the restart in the system. This clears up temporary problems caused by power line disturbances, static, etc.

SERVICE TECHNICIAN NOTE:

The system reset circuitry described above requires that the coin counter is attached to the system. If there is a coin counter problem and no replacement is available, the game will function properly if a 10K Ohm resistor is connected across the coin counter input pins to the video logic board.

WARRANTY/FACTORY SERVICE INFORMATION

WARRANTY

All Gremlin products are warranted against defective materials and workmanship. This warranty applies for 90 (ninety) days from the date of delivery. This warranty covers defects/failure for all electronic components and connectors (except fuses and lamps, which have no warranty) under normal use. No other warranty is expressed or implied. Permission must be obtained from factory for warranty repair returns. No liability will be accepted if returned without such permission.

FACTORY SERVICE

Should an assembly become defective, contact your local distributor. Factory authorization to return the assembly will be issued with transportation charges prepaid. If decided upon by factory representative, an advance replacement will be made. No merchandise may be returned to the factory without prior authorization.

The assembly will be repaired and returned, transportation charges prepaid, if still in warranty and no advance replacement made.

If the assembly is found to be damaged by misuse, improper attempts at repair, or abuse, it will be repaired and returned with transportation and repair charges billed.

Out of warranty assemblies, if returned to the factory with transportation charges prepaid, will be repaired and returned with transportation and repair charges billed.

In the instance of a defect of an assembly manufactured by other than GREMLIN INDUSTRIES, INC., every effort will be made to assist the customer in obtaining satisfaction from the original manufacturer.


REPACKAGING INSTRUCTIONS

Should it be necessary to ship this game, the following instructions are provided for game crating.

- A) If the original shipping bolts (Ref. 1) have been discarded, obtain four 5/16"-18" x 1-3/4" hex head bolts with 5/16" flat washer. Lay game on its side and attach skid (Ref. 2).
- B) Place game upright. Tape game keys to upper flange of operator's panel (Ref. 3). Crate the game using appropriate shock-absorbent packing material (Ref. 4). Include padding on all four corners of the game (Ref. 5).
- C) After crating is completed, secure package with strapping (Ref. 6).

NOTE: If the game is to be shipped to GREMLIN INDUSTRIES for service or repair, attach a tag identifying the distributor and indicate the service or repair to be accomplished; include the full serial number of the game.

REPACKAGING INSTRUCTIONS

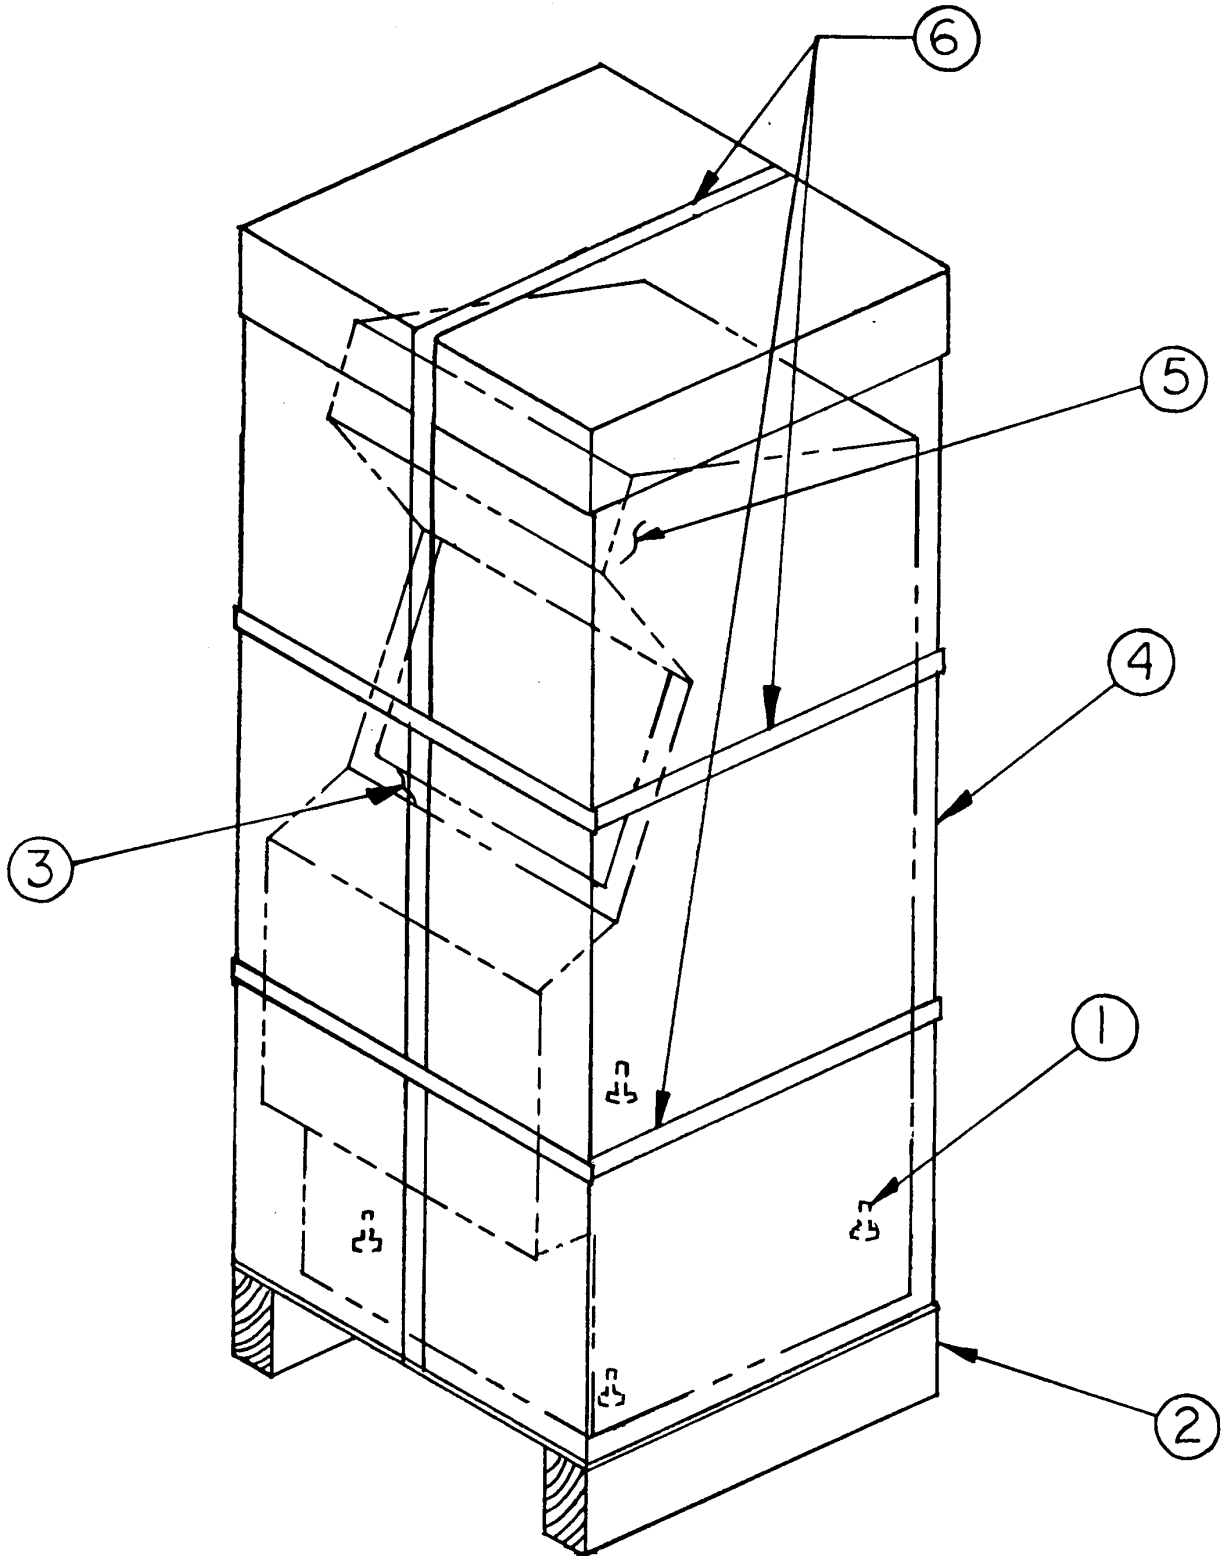

DEPTHCHARGE GAME CONCEPT

DEPTHCHARGE is a video game of skill and strategy in which the player attempts to hit as many submarines as possible using depth charges launched from a maneuverable surface ship. Game time runs 90 count.

PLAYFIELD:

At the top of the screen is a ship which can be moved left or right using two player control buttons. Two additional control buttons launch depth charges from either the right or left side of the ship. The ship movement is necessary both offensively to aim depth charges, and defensively to dodge mines which are released by the submarines and float to the surface. The words TIME and SCORE are displayed in the upper left and upper right of the screen, respectively.

As the game progresses, as many as four submarines appear at different depths, and move at different speeds across the screen. Each submarine has a number on its side, which indicates the point value for sinking that sub.

DEPTH CHARGES:

The player has six (6) depth charges at his disposal. At the top center of the screen, the number of depth charges in his arsenal is displayed. Every time a depth charge is launched, one of the depth charge counters disappears, and every time a depth charge explodes, one depth charge counter reappears. The depth charge counters thus give a clear indication of how many are available for firing at any time during the game.

MINES:

As the submarines move across the screen, they randomly release mines which float slowly to the surface and explode. If one of these mines hits the player's ship, a stiff penalty is imposed (See SCORING). The mine explosion is accompanied by a realistic explosion and "spray" sound.

GRAVEYARD:

Every time a submarine (or the ship) is sunk, a miniature image of it appears at the bottom of the screen. Every hit adds another submarine to the graveyard, so a player can gauge his proficiency with a quick glance at the graveyard. The graveyard images are also used for end-of-game bonus scoring.

DEPTHCHARGE GAME CONCEPT (Cont'd.):

SUBMARINES:

Submarines run automatically, and appear at random depths and speeds. There are never more than four subs on the screen at one time. The deep submarines carry higher scores than shallow ones, since they are more difficult to hit. The mines which the subs release are also automatic and random.

SCORING:

Hitting a submarine scores the value shown on the sub. Anytime the player's ship is sunk by a mine, the player's score is cut in half. At the end of the game, a 30 point bonus is awarded for every submarine in the graveyard.

HIGH SCORE:

Current high score is displayed at the lower center of the screen during the advertising sequence. It updates with each new higher score. High score can be reset to zero by unplugging the game from line voltage and plugging it back in.

TIME:

DEPTHCHARGE is set to run for approximately two minutes. This has been found to be an optimum time, and is not adjustable.

OVERTIME:

If a player manages to score 500 or more points in a game, he is awarded extended time. Extended time runs 45 counts.

END-OF-GAME:

Whenever DEPTHCHARGE is not being played, an "advertisement" sequence is initiated. The game plays itself to attract attention. To avoid patron confusion, the words "Game Over" appear while the advertising game is being played, and during a thirty (30) second delay thereafter. Following the delay, the advertising sequence repeats.

DEPTHCHARGE GAME CONCEPT (Cont'd.):

E-Z Adjust TM control Panel - DEPTHCHARGE has only one adjustment and it is located behind the coin door.

VOLUME CONTROL - Set to desired volume for boom and tones during the game. This also affects advertising boom volume if boom switch is "ON".

MAINTENANCE

NOTE: IF AT ANY TIME THE T.V. SCREEN SHOWS A MEANINGLESS DISPLAY OR THE GAME OTHERWISE MALFUNCTIONS, DROP A COIN IN THE COIN MECHANISM. THIS SHOULD CORRECT THE PROBLEM. IF NOT, THE GAME REQUIRES SERVICE.

FACTORY ASSISTANCE:

TECHNICAL HELP IS AVAILABLE FROM THE GREMLIN FACTORY. IF A PROBLEM OCCURS WHICH CANNOT BE EASILY RESOLVED BY YOUR DISTRIBUTOR, A PHONE CALL OR LETTER TO THE FACTORY WILL BRING ATTENTION TO YOUR PROBLEM BY A TRAINED REPRESENTATIVE.

EQUIPMENT:

1. Oscilloscope - 50 mhz or wider band width
2. DVM (Digital Volt Meter)
3. OHM Meter
4. Logic Probe
5. Solder Station - 75 Watt or less
6. Jumpers

The above list is recommended for anyone attempting to service DEPTHCHARGE.

OPERATIONAL WAVE FORMS

The following set of scope photographs are intended to aid in the troubleshooting of a malfunctioning Video Logic Board. Although the photos were taken with a four channel scope, the system can be just as easily checked out with a single or dual-channel scope. The important thing to look for is the existence of the signals shown.

SIGNALS 1-15:


Signals 1-15 show the signals developed by the Video Logic board's master signal sequencer. These signals form the basic timing for the entire board, and therefore, should be checked first. All photos use 5 volt per centimeter vertical sensitivity, and a time base of 200 nanoseconds per division horizontal.

The important thing to check with these photos is the relative shapes of the signals. Don't be concerned with the actual pulse widths and frequencies. If any of the signals are missing (always high or low) check the input side of the 74S175 latch which corresponds to the defective output. If a signal is seen here (don't worry if it is loaded with noise spikes, the 74S175 is there to remove them), the 74S175 should be suspected. Keep in mind that it could also be a line which the 74S175 is driving which is pulling high or low. The best way to check this is to use an exacto knife to cut the trace leaving the proper 74S175 output pin, and again check the 74S175 output. (CAUTION: BEFORE ATTEMPTING ANY REPAIRS REFER TO PAGE 3. FOR WARRANTY CONDITIONS.)


If it is now correct, the problem is on the "downstream" side of the 74S175. DON'T FORGET TO RE-JUMPER THE CONNECTION YOU CUT. If the input side of the 74S175 is also "dead", suspect the PROM (U27 or U28), whichever is applicable.

OPERATIONAL WAVE FORMS (Cont'd.):


SIGNALS 1-15:

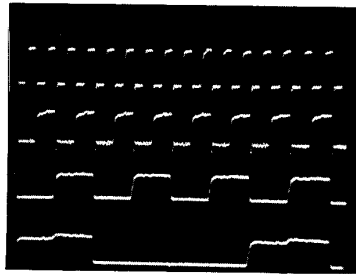

1. (U14-15)
2. (U14-10)
3. M1 (U14-2)
4. M2 (U14-7)

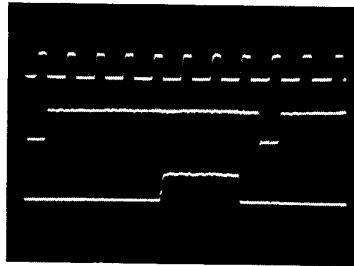


5. (U13-15) SRCK (Shift Register Clock)
6. (U13-2) SRLD (Shift Register Load)
7. M4 (U13-13)

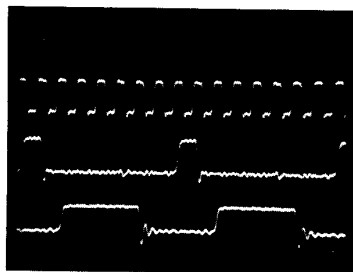


8. (U11-14) Pin 9
9. (U12-15) Processor-Clock Phase 1
10. (U12-10) Processor-Clock Phase 2

OPERATIONAL WAVE FORMS (Cont'd.):

SIGNALS 1-15 (Cont'd.):

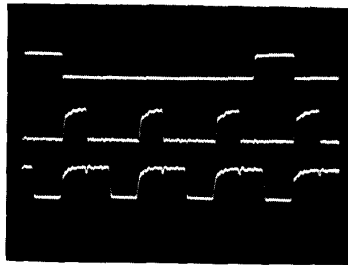

- 11. S1 (U11-17)
- 12. $\overline{\text{RAS}}$ (U29-12)
- 13. $\overline{\text{CAS}}$ (U11-2)

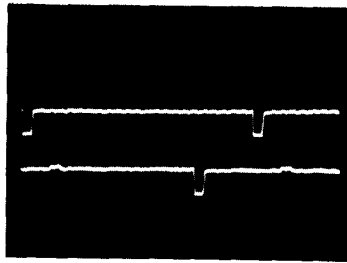


- 14. $\overline{\text{RWT}}$ (U11-10)
- 15. $\overline{\text{MSB}}$ (U12-7)

OPERATIONAL WAVE FORMS (Cont'd.):

SIGNALS 16 AND 17:

Signals 16 and 17 are the 8080 clocks. Vertical sensitivities are 5 volts per centimeter; horizontal is 200 ns/cm. Make sure that these signals pull up to at least 10.5 volts (they normally drive to 12 volts).

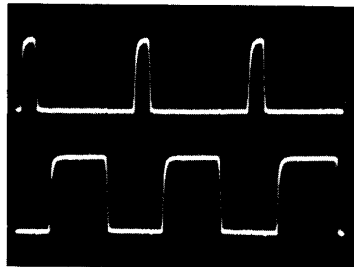


16. 12 Volt
Phase 1 Clock
(TP 1)

17. 12 Volt
Phase 2 Clock
(TP 2)


OPERATIONAL WAVE FORMS (Cont'd.):

SIGNALS 18 THROUGH 28:

Signals 18 through 28 show signals from the horizontal timing chain for the CRT timing. The three photos show the top signal as HORIZONTAL RESET, which is a good triggering signal for viewing the other waveforms. The time between horizontal reset pulses should be about 63 microseconds.

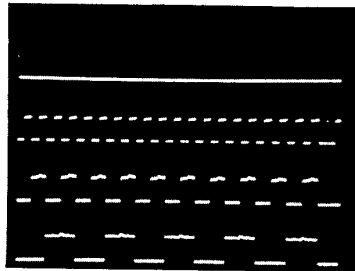


- 18. Horizontal Reset (U46-2,12)
- 19. 8H (U46-3)
- 20. 16H (U46-4)
- 21. 32H (U46-5)

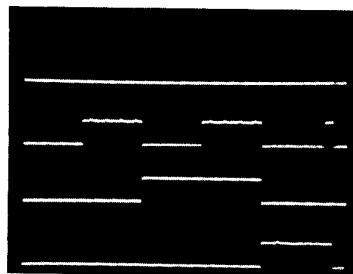

- 22. Horizontal Reset (U46-2,12)
- 23. 64H (U46-6)
- 24. 128H (U46-11)
- 25. 256H (U46-10)

OPERATIONAL WAVE FORMS (Cont'd.):

SIGNALS 18 THROUGH 28 (Cont'd.):

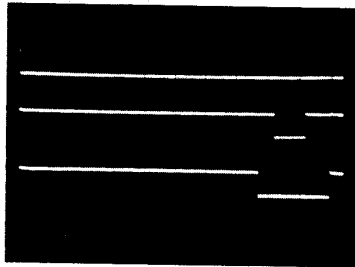


- 26. Horizontal Reset (U46-2,12)
- 27. HSYNC (U36-8)
- 28. HBLANK (U47-1)


OPERATIONAL WAVE FORMS (Cont'd.):

SIGNALS 29 THROUGH 43:

Signals 29 through 43 show the vertical timing chain waveforms. In these four photos, the top trace is VERTICAL RESET. Note that the horizontal time base for signals 29 through 36 is different than for 37 through 43. The time between vertical reset pulses should be about 16 milliseconds (last two photos).

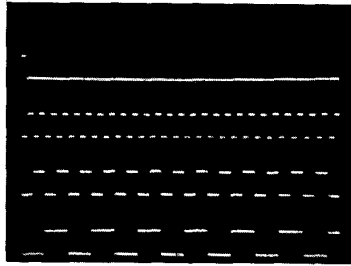


- 29. Vertical Reset (U49-2)
- 30. 1V (U49-3)
- 31. 2V (U49-4)
- 32. 4V (49-5)

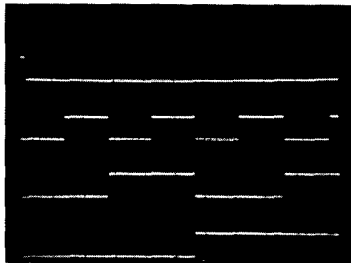


- 33. Vertical Reset (U49-2)
- 34. 8V (U49-6)
- 35. 16V (U49-11)
- 36. 32V (U49-10)

OPERATIONAL WAVE FORMS (Cont'd.):

SIGNALS 29 THROUGH 43 (Cont'd.):

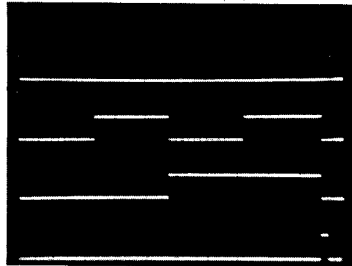

- 37. Vertical Reset (U49-2)
- 38. 64V (U49-9)
- 39. 128V (U49-8)
- 40. 256V (U60-5)

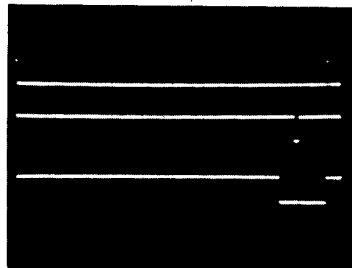

- 41. Vertical Reset (U49-2)
- 42. VSYNC (U47-12)
- 43. VBLANK (U48-5)


DEPTHCHARGE REPLACEABLE PARTS LIST

| <u>DESCRIPTION</u> | <u>PART NUMBER</u> | <u>QTY USED.</u> |
|------------------------|--------------------|------------------|
| BUSHING S/REL. 3/8" | 280-0001 | 1 |
| BUTTON, PLUNGER RED | 240-0006 | 4 |
| CABINET VIDEO | 140-0022 | 1 |
| CABINET TIE | 280-0005 | 10 |
| CASH BOX, TABLE | 220-0013 | 1 |
| CLIP, SWITCH | 250-0048 | 1 |
| CLIP, WIRE HOLDDOWN | 280-0004 | 35 |
| COIN MECHANISM, DUAL | 220-0010 | 1 |
| CONTROL PANEL | 280-0039 | 1 |
| COVER, SPEAKER 6x9 | 130-0002 | 1 |
| DECAL, CAUTION 115V | 420-0030 | 1 |
| DECAL, DEPTHCHARGE | 420-0064 | 1 |
| DECAL, IMPORTANT NOTE | 420-0038 | 2 |
| FEET, CABINET | 280-0030 | 4 |
| FIXT, LAMP FLOUR 18" | 390-0012 | 1 |
| FRAME, BEZEL | 250-0032 | 1 |
| GRAPHIC, FRONT | 253-0056 | 1 |
| GRAPHIC, SIDE LEFT D/C | 253-0042 | 1 |
| GRAPHIC, SIDE RT. D/C | 253-0041 | 1 |
| JUNCTION BOX COVER M | 140-0021 | 1 |
| LAMP, FLUORESCENT 18" | 390-0011 | 1 |
| LID ASSY, COIN BOX | 220-0016 | 1 |
| MANUAL, DEPTHCHARGE | 420-0077 | 1 |
| MASK, SHADOW CABINET | 253-0014 | 1 |
| MONITOR SCREEN | 253-0028 | 1 |

DEPTHCHARGE REPLACEABLE PARTS LIST (Cont'd.):

| <u>DESCRIPTION</u> | <u>PART NUMBER</u> | <u>QTY USED.</u> |
|-------------------------|--------------------|------------------|
| MONITOR, VIDEO 19" | 200-0002 | 1 |
| NUT, WIRE | 280-0010 | 2 |
| PANEL, DISPLAY UPPER | 253-0029 | 1 |
| PANEL, FRONT SWITCH | 250-0103 | 1 |
| PLATE, COIN RETENSION | 250-0062 | 2 |
| SPEAKER, GAME 6x9 | 130-0001 | 1 |
| SPEAKER, COVER 6x9 | 130-0002 | 1 |
| SPRING RETAINER | 250-0034 | 1 |
| VOULME CONTROL BRACKET | 250-0031 | 1 |
| VOLUME CONTROL KNOB | 240-0001 | 1 |
| ASSY, COIN COUNTER | 814-0011 | 1 |
| ASSY, JUNCTION BOX | 808-0009 | 1 |
| ASSY, MONITOR HARN. | 814-0010 | 1 |
| ASSY, POWER SUPPLY | 814-0005 | 1 |
| ASSY, SPEAKER CABLE | 807-0010 | 1 |
| DEPTHCHARGE SOUND BOARD | 814-0001 | 1 |
| HARN. COIN MECH. ASSY. | 814-0008 | 1 |
| HARN. JUMPER ASSY. | 814-0007 | 1 |
| POWER SUPPLY ASSY. | 814-0003 | 1 |
| VIDEO LOGIC ASSY. | 814-0002 | 1 |
| HARN. VOL. CONTROL BLK. | 814-0009 | 1 |
| OPERATOR SWITCH ASSY. | 814-0006 | 1 |

| REVISIONS | | DATE | INITIALS |
|-----------|--------------|------|----------|
| 1 | DES. RLP/SLM | | |

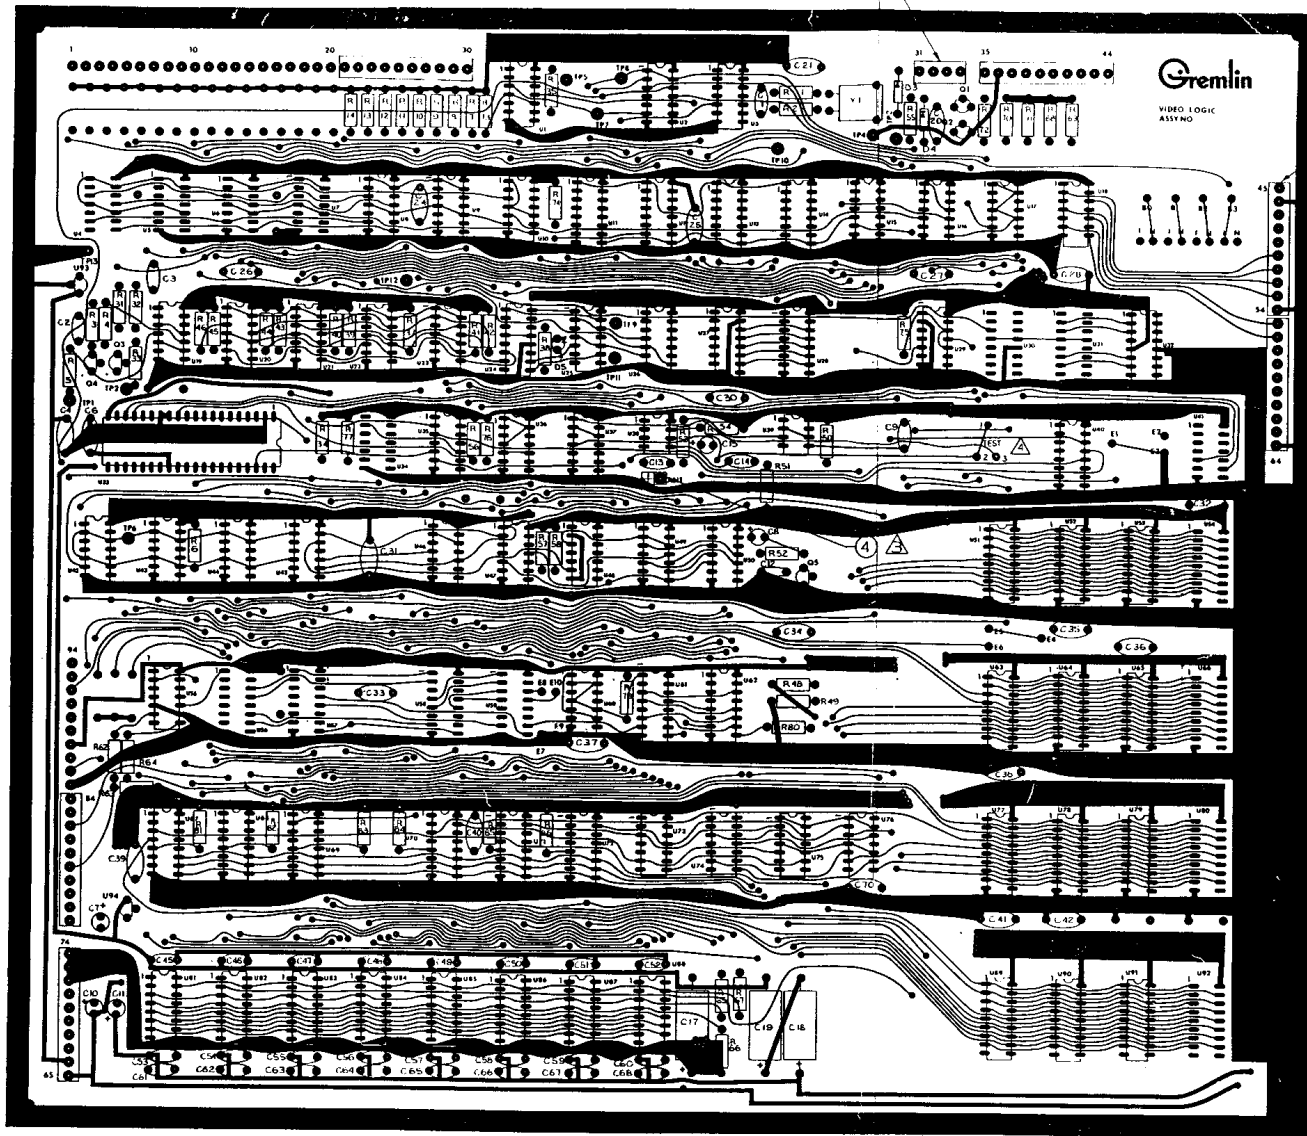

② (6, PLCS)

| QTY | PART NUMBER | DESCRIPTION | ITEM NUMBER |
|-----|-------------|--------------------|--|
| 2 | 215-0004 | SOCKET | U177, X068 |
| 16 | 215-0002 | SOCKET | X069, X070, X071, X072, X073, X074, X075, X076, X077, X078 |
| 4 | 482-0014 | 1K5TOR 2W400 | X089, X091 |
| 1 | 482-0010 | 1K5TOR PEB500 | R1 |
| 1 | 481-0006 | DIODE 1N31A | D4 |
| 1 | 481-0001 | DIODE 1N4002 | D3 |
| 1 | 471-0414 | RES 470K 1/2W 5% | R54 |
| 1 | 471-0412 | RES 47K 1/2W 5% | R35 |
| 1 | 471-0411 | RES 470 1/2W 5% | R3, R31, R55 |
| 1 | 471-0333 | RES 33K 1/2W 5% | R53 |
| 1 | 471-0331 | RES 330 1/2W 5% | R1, R2, R6, R64, R67 |
| 8 | 471-0223 | RES 22K 1/2W 5% | R32, R46 |
| 1 | 471-0221 | RES 220 1/2W 5% | R4, R12 |
| 1 | 471-0220 | RES 22 1/2W 5% | R5, R33 |
| 2 | 471-0104 | RES 100K 1/2W 5% | R50, R51 |
| 3 | 471-0103 | RES 10K 1/2W 5% | R52, R57, R58 |
| 12 | 471-0102 | RES 1K 1/2W 5% | R6, R14, R34, R37, R45, R49, R56 |
| 1 | 471-0101 | RES 100 1/2W 5% | R63, R68, R76, R15, R80, R86 |
| 1 | 316-0044 | PROM D/C U181 | U181 |
| 1 | 316-0003 | LED RED | D5 |
| 1 | 316-0005 | PROM D/C U18 | U18 |
| 1 | 316-0031 | PROM D/C U180 | U180 |
| 1 | 316-0030 | PROM D/C U189 | U189 |
| 1 | 316-0029 | PROM D/C U18 | U18 |
| 1 | 316-0028 | PROM D/C U17 | U17 |
| 1 | 316-0027 | PROM D/C U16 | U16 |
| 1 | 316-0026 | PROM D/C U14 | U14 |
| 1 | 316-0025 | PROM D/C U13 | U13 |
| 1 | 316-0024 | PROM D/C U13 | U13 |
| 1 | 316-0023 | PROM D/C U12 | U12 |
| 1 | 316-0022 | PROM D/C U11 | U11 |
| 1 | 316-0014 | PROM SLD 32 X8 | U28 |
| 1 | 316-0015 | PROM CONT 32 X8 | U27 |
| 8 | 315-0014 | MOSFET 1K 400K-15 | U1, U12, U18A |
| 1 | 315-0014 | IC 8026A CPU | U1 |
| 4 | 314-0033 | IC 74S175 | U11, U14 |
| 1 | 314-0047 | IC 7414 | U15 |
| 1 | 314-0046 | IC 74504 | U16 |
| 1 | 314-0043 | IC 7407 | U18 |
| 1 | 314-0039 | IC 74166 | U12 |
| 6 | 314-0035 | IC 74151 | U1, U12 |
| 2 | 314-0030 | IC 74393 | U16, U19 |
| 1 | 314-0022 | IC 7486 | U15 |
| 2 | 314-0021 | IC 7415 | U24, U32 |
| 1 | 314-0020 | IC 7430 | U17 |
| 1 | 314-0011 | IC 74125 | U18, U19, U20, U21, U15, U16 |
| 3 | 314-0015 | IC 7404 | U18, U26, U41 |
| 10 | 314-0012 | IC 7408 | U2, U22, U23, U25, U42, U45, U13, U17 |
| 1 | 314-0011 | IC 7442 | U40 |
| 2 | 314-0010 | IC 7410 | U3, U50 |
| 3 | 314-0009 | IC 7400 | U10, U16, U35 |
| 2 | 314-0008 | IC 7417 | U1, U2, U36, U48, U60 |
| 2 | 314-0001 | IC NE555 | U34, U38 |
| 1 | 313-0017 | IC LM79L05 | U14 |
| 1 | 313-0016 | IC LM76L12 | U13 |
| 1 | 230-0008 | ITAL 15.46848 MHZ | Y1 |
| 1 | 212-0011 | CONN FEMALE 2 PIN | ① |
| 1 | 212-0004 | CONN MALE 4 PIN | ② |
| 6 | 212-0005 | CONN MALE 10 PIN | ③ |
| 14 | 211-0004 | CONN MALE TEST PT | TP1-TP13, ANT |
| 1 | 170-0083 | R.C.B. | ① |
| 3 | 153-0001 | CAP TANT 10 MF 25V | C7, C10, C11 |
| 1 | 152-0002 | CAP 22 20T 100V | C12 |
| 1 | 151-0012 | CAP CER 100V | C4, C6, C13, C20, C44, C69, C70 |
| 1 | 151-0005 | CAP CER 600V 50V | C1 |
| 1 | 151-0001 | CAP CER 60V 50V | C2, C3, C9, C14, C45, C68 |
| 3 | 150-0012 | CAP CER 25V | C11, C19 |


△ JUMPER TO BE ADDED AFTER FINAL TEST
 1. ANT. WIRE IS WHI. 12" 22 GA. CONNECTED TO PIN 212-0011
 2. ALL CAPACITANCE VALUES ARE IN MICROFARADS
 3. ALL RESISTANCE VALUES ARE IN OHMS 1/2W 5% (R-1000)

NOTES: UNLESS OTHERWISE SPECIFIED

| 714-0001 | DEPT CHARGE |
|-------------|-------------|
| HEAT ASSY | VIDEO CON |
| APPLICATION | |

| PARTS LIST | | GREMLIN INC. SAN DIEGO CALIFORNIA 92123 | |
|--------------------|---------|---|---------------------|
| APPROVALS | DATE | PARTS OVERLAY VIDEO LOGIC BOARD | |
| DRAWN L. J. LIPMAN | 7-25-77 | SIZE | DRAWING NO. 84-0002 |
| CHECKED | | SCALE | REV |
| RELEASED | | E | B |
| APPROVED | | SHEET 4 OF 4 | |

| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | LTR | DESCRIPTION | DATE | APPROVED |

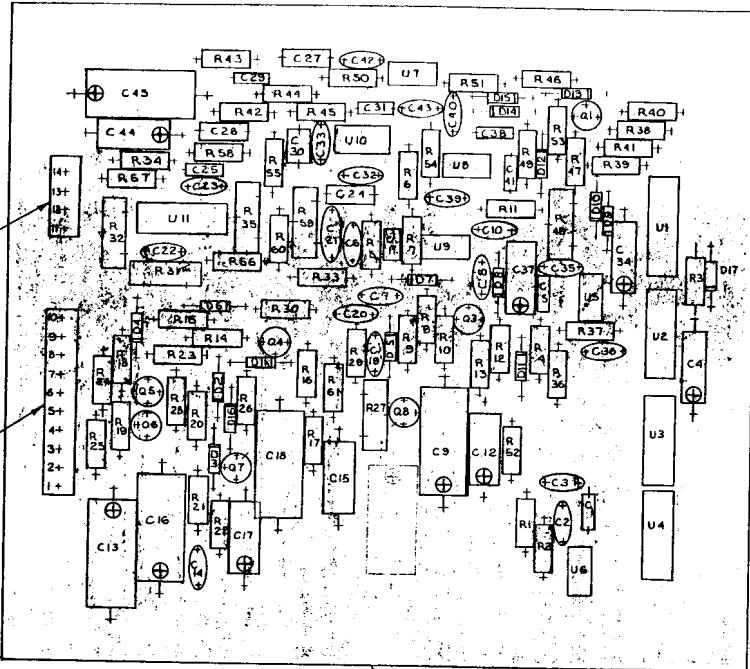

| | | | |
|----|----------|-----------------------|---|
| 1 | 152-0020 | CAP. F. 47µF 100V | C 30 |
| 2 | 151-0008 | CAP. CER. 0.001µF 50V | C6, C25 |
| 1 | 212-0004 | CONN. MALE 4PIN | 3 |
| 1 | 212-0003 | CONN. MALE 10 PIN | 2 |
| 1 | 315-0028 | IC. 4006 | U4 |
| 1 | 315-0027 | IC. 4030 | U3 |
| 1 | 315-0006 | IC. 4017 | U1 |
| 1 | 315-0005 | IC. 4013 | U2 |
| 3 | 315-0004 | IC. LM 741 | U8, U7, U10 |
| 1 | 313-0006 | IC. LM 324 | U11 |
| 3 | 314-0001 | IC. NE 555 | U5, U6, U9 |
| 6 | 482-0014 | RESISTOR 2M4401 | Q1, Q3, Q7 |
| 1 | 481-0006 | RESISTOR 2M4403 | Q8 |
| 17 | 481-0005 | DIODES 1N414 | D1-D17 |
| 1 | 415-0008 | POT 50K TRIMMER | R27 |
| 2 | 415-0006 | POT 100K TRIMMER | R35, R48 |
| 1 | 415-0001 | POT 10K TRIMMER | R59 |
| 2 | 415-0002 | POT 1MΩ TRIMMER | R31, R32 |
| 1 | 471-0393 | RES. 39K 1/2W 5% | A2 |
| 2 | 471-0101 | RES. 100Ω 1/2W 5% | A53, A55 |
| 2 | 471-0222 | RES. 2.2K 1/2W 5% | A62, A56 |
| 1 | 471-0824 | RES. 820K 1/2W 5% | A49 |
| 1 | 471-0124 | RES. 120K 1/2W 5% | A41 |
| 1 | 471-0683 | RES. 68K 1/2W 5% | A40 |
| 2 | 471-0153 | RES. 15K 1/2W 5% | A38, A54 |
| 3 | 471-0471 | RES. 470Ω 1/2W 5% | A24, R14, R18 |
| 1 | 471-0563 | RES. 56K 1/2W 5% | A22 |
| 1 | 471-0682 | RES. 68K 1/2W 5% | A17 |
| 3 | 471-0220 | RES. 2.2K 1/2W 5% | R16, R20, R28 |
| 4 | 471-0562 | RES. 56K 1/2W 5% | R18, R19, R25, R26 |
| 1 | 471-0105 | RES. 1MΩ 1/2W 5% | R51 |
| 1 | 471-0681 | RES. 680Ω 1/2W 5% | R13 |
| 3 | 471-0472 | RES. 47K 1/2W 5% | R12, R58, R41 |
| 2 | 471-0154 | RES. 150K 1/2W 5% | R11, R47 |
| 6 | 471-0223 | RES. 22K 1/2W 5% | R10, R23, R29, R42, R44, R45 |
| 8 | 471-0103 | RES. 10K 1/2W 5% | R9, R21, R30, R33, R34, R46, R57, R60 |
| 2 | 471-0104 | RES. 100K 1/2W 5% | R7, R8 |
| 1 | 471-0224 | RES. 220K 1/2W 5% | R5 |
| 6 | 471-0473 | RES. 47K 1/2W 5% | R3, R4, R6, R37, R39, R43 |
| 3 | 471-0102 | RES. 1K 1/2W 5% | R1, R36, R50 |
| 1 | 153-0004 | CAP. TANT. 4.7µF 25V | C37 |
| 1 | 153-0002 | CAP. TANT. 1µF 25V | C4 |
| 3 | 151-0011 | CAP. CER. 0.1µF 50V | C20, C22, C23, C32, C33, C39, C40, C42, C43 |
| 3 | 152-0017 | CAP. F. 33µF 100V | C24, C27, C28 |
| 2 | 152-0007 | CAP. F. .001µF 250V | C1 |
| 2 | 152-0006 | CAP. F. 0.022µF 100V | C38, C41 |
| 1 | 152-0005 | CAP. F. 0.001µF 50V | C11, C31 |
| 1 | 152-0002 | CAP. F. 2.2µF 100V | C5 |
| 2 | 152-0001 | CAP. F. 1µF 100V | C21, C29 |
| 9 | 151-0001 | CAP. CER. 0.05µF 50V | C2, C3, C7, C8, C10, C14, C18, C35, C36 |
| 1 | 153-0003 | CAP. TANT. 2.2µF 25V | C34 |
| 4 | 150-0013 | CAP. E. 100µF 25V | C13, C45, C18 |
| 2 | 150-0012 | CAP. E. 47µF 25V | C9, C16 |
| 4 | 153-0001 | CAP. TANT. 10µF 25V | C12, C15, C17, C44 |
| 1 | 170-0081 | PCB | 1 |

| QTY | CODE | PART OR IDENTIFYING NO. | NOMENCLATURE OR DESCRIPTION | ITEM NUMBER |
|--|----------|-------------------------|-----------------------------|-------------|
| PARTS LIST | | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE | | | | |
| FRACTIONS | DECIMALS | ANGLES | | |
| = | ± | ± | | |
| MATERIAL | | | | |
| FINISH | | | | |
| APPLICATION | | | | |
| DO NOT SCALE DRAWING | | | | |

CONTRACT NO. **Gremlin Industries, Inc.**
San Diego, California 92123


APPROVALS DATE
DRAWN **LIPYAK L.J.** 5-9-77
CHECKED **R.A. ROSSMAN** 6-8-77
R.A. ROSSMAN 6-3-77

PARTS OVERLAY
DEPTHCHARGE
SOUND BOARD

SEE CODE IDENT NO. DRAWING NO. REV
D **814-0001** **B**

814-0001

A

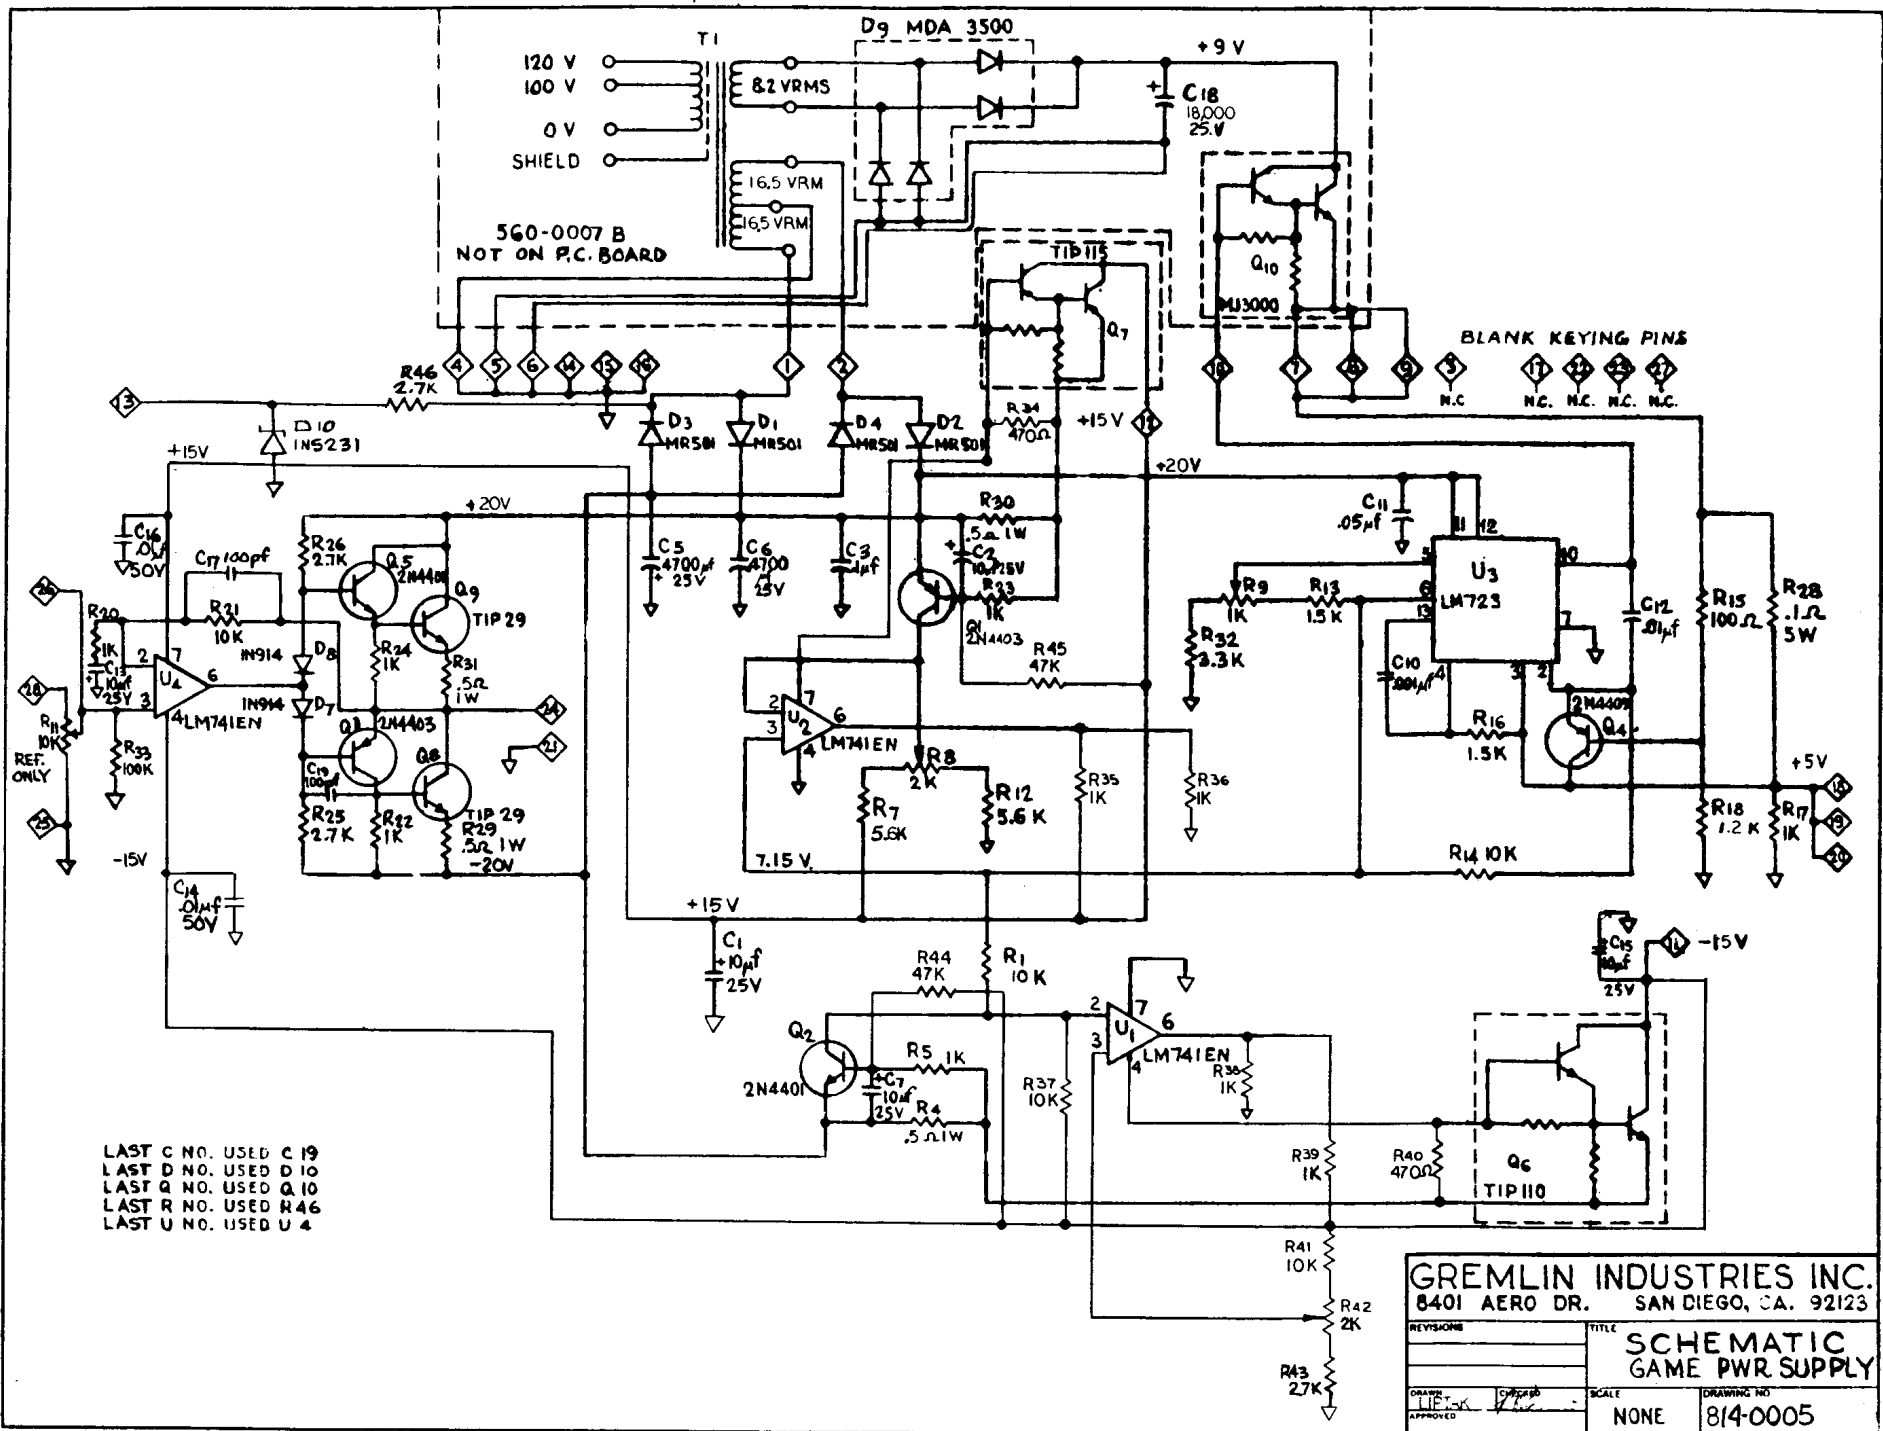

LAST C NO. USED C 19
 LAST D NO. USED D 10
 LAST Q NO. USED Q 10
 LAST R NO. USED R 46
 LAST U NO. USED U 4

GREMLIN INDUSTRIES INC.
 8401 AERO DR. SAN DIEGO, CA. 92123

| | | | |
|---|------------------|-------|-------------|
| REVISIONS | TITLE | SCALE | DRAWING NO. |
| | SCHEMATIC | NONE | 814-0005 |
| DRAWN: [Signature] APPROVED: [Signature] | | | |